


SHW39-09 Series □ 39 mm

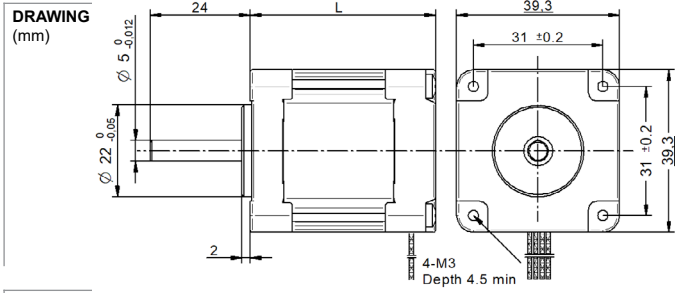

MODEL NAME DESIGNATION

SHW3520 - STEP ANGLE - CURRENT

Example: SHW35-09-100



PHOTO



OPTIONS MOTOR DRIVERS AND POWER SUPPLIES



MOTOR FEATURES

Step angle	0.9
Step angle accuracy	± 5% full step no load
Shaft material	X8CrNiS18-9 303
Bearing type	Ball bearing
Radial play	0.02 mm 450 g
Axial play	0.08 mm 450 g
Max. radial force	28N 20 mm from shaft
Max. axial force	10N
Dielectric strength	600VAC 1 sec.
Insulation resistance	100MΩ 500VDC
Ambient temperature	-20° - (+50°)
Insulation class	Class B
IP rating	IP30
Connection leads	UL 1430 AWG26 300 mm
Connector	No


CUSTOMIZATION EXAMPLES

- Shaft configurations
- Bearing type and preload
- Temperature range
- IP rating
- Winding and performance optimization
- Cabling and harness
- Gear box to motor combinations
- Encoder to motor combinations

OPTIONS

- Stepper motor drivers Transmotec DS series
- Power supplies Transmotec LRS series

EXCITATION SEQUENCE TABLE



CW	A	C	B	D
1	●		●	
2		●	●	
3		●		●
4	●			●
1	●		●	

● = + Polarity

MOTOR DATA

Graph	A			
Motor model	SHW3944-09-028			
Holding torque mNm	0.297			
Detent torque Nm	0.0200			
Rotor inertia gcm ²	36			
Current phase A	0.28			
Resistance phase Ω	60.00			
Inductance mH	145			
Length mm	44.5			
Weight Kg	0.290			

SPEED | TORQUE PERFORMANCE GRAPH PULL OUT

Graph	A			
Supply voltage VDC	24			
Current phase A	0.35			

